

Paseo Crossing

UHF or RFID Long Range Reader Tag Installation

This document is intended as a general guide to selecting optimum tag placement and installation and is not inclusive of all vehicle makes, models, sizes, or types. Please check local codes governing windshield obstruction and tag placement. Tag placement should be chosen to not interfere with the driver's vision.

Tools Required: Clean Rag, Glass Cleaner, and Ruler or Measuring Tape

Typical Installation Time: Less Than 10 Minutes


Introduction

Congratulations on choosing a long-range proximity credential to access your property. These tags are designed for secure and convenient access. They can be installed on the interior or exterior of the windshield and, if properly installed, are designed to withstand the harshest of climates. The tags are non-transferable and cannot be removed without rendering the tag inoperable. Typical range of the reader is 25' from the read head. The read head is installed on a post at about 8' in the air on the driver's side of the entry drive. Each tag is uniquely identified and can be deactivated in the event of vehicle theft or sale.




Step 1 – Choosing Optimum Placement of Tag



The tag will need to be placed on the driver’s side of the windshield. Standard size passenger vehicles should have the tag placed higher on the windshield. Large trucks, SUVs, and vans should have the tag placed lower on the windshield.

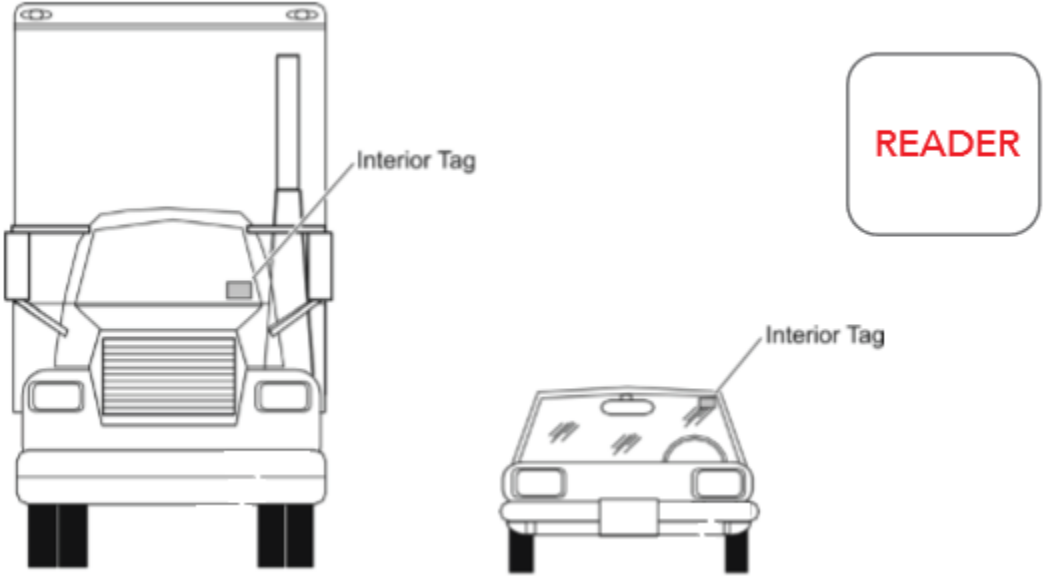

Tags can be centered on the windshield near the rearview mirror. However, this may reduce read range.

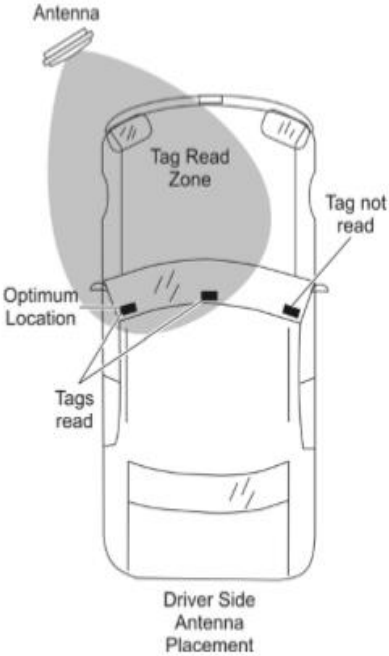

Tags must be installed a minimum of 2.5" from any metallic material, including the rearview mirror. If installing on the outside of the vehicle, ensure the tag is clear of the windshield wiper path.

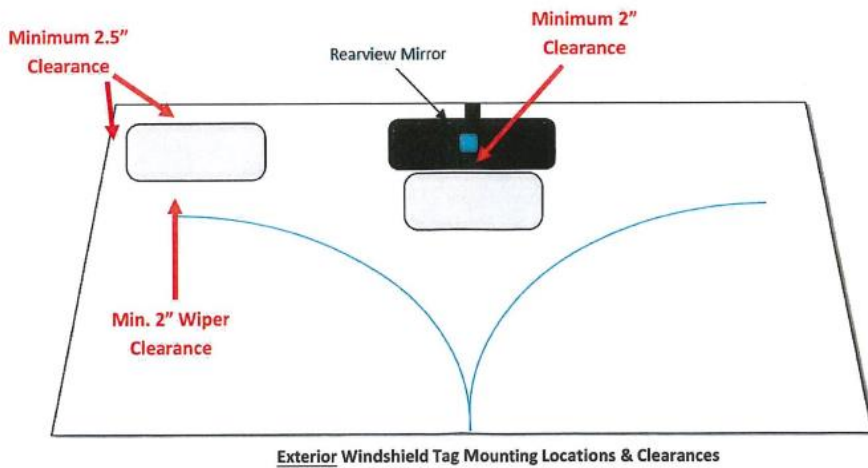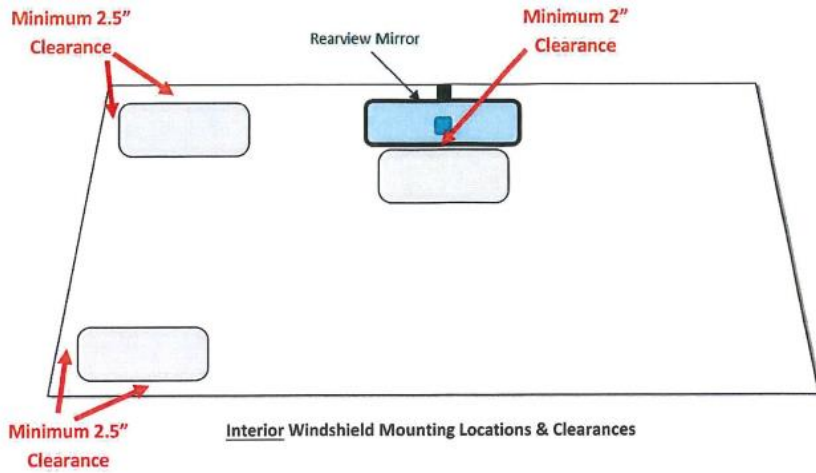

Tag must be placed horizontally. Vertically placed tags will not be reliably scanned by the reader.

IMPORTANT!

When installing credentials be sure that they are installed horizontally as shown.

- ISO Prox Style Card
- Card Holder
- Adhesive Sticker



STEP 2 – Tag Installation

Do not bend or crease tags during installation, as damage will occur. Thoroughly clean mounting surface. Wash and dry hands before peeling sticker backing. Dirt and oil from skin will prevent adhesive from bonding to glass.

Peel the backing from tag and carefully place tag to windshield location. Firmly press across the tag to adhere it to the windshield. If a protective overlay was provided, peel clear overlay sticker backing and center it over the tag. Firmly press it over the tag, being careful to minimize air bubbles.

Do not wash vehicle or disturb tag for a minimum of 24 hours after tag placement.

STEP 3 – Testing and Use

The long-range reader should activate the gate as you approach the reader. Typical read range is 25' depending on installation. Please allow ample time for the gate to open upon approach.